

VINYL FLOOR SEMI SPRUNG DANCE FLOOR

SEMI SPRUNG DANCE VINYL FLOOR IN THICKNESS RANGING FROM 3.5 TO 8.50 MILLIMETRES WITH SLIGHTLY EMBOSSED FINISH

SLIK	3.50 mm for rehearsal rooms. Embossed Finish (multipurpose)
SURF	5.00 mm for rehearsal rooms. Embossed Finish (multipurpose)
OCEAN	6.50 mm for rehearsal rooms. Embossed Finish (multipurpose)
SHARK	8.50 mm for rehearsal rooms. Embossed Finish (multipurpose)

All the dance vinyl floors in this range are available in 12 solid colours.

TECNICAL DATA SHEET

Heterogeneous PVC floor
Friction coefficient from 0,8 to 1,1
Wear layer 0,7 mm
Dimensional stability $\leq 0,10\%$
Wear resistance ≤ 19
Roll height 2,0 m
Roll length 20,5 m
Weight 2250 g/mq
Fire resistance Cfl-s1
Shock absorption from 17 to 35%

Made and patented on specifications of Antheo dance flooring.




SURF, OCEAN AND SHARK CONFORM TO EN 14904 REGULATION, SEMI-SPRUNG DANCE FLOORS.



REDUCTION OF BONE INJURIES RISK



PREVENTION OF MUSCULAR FATIGUE

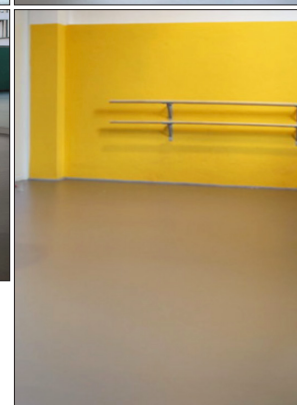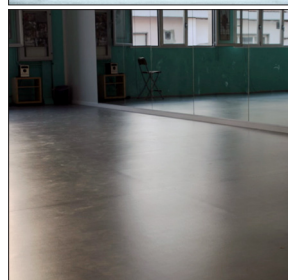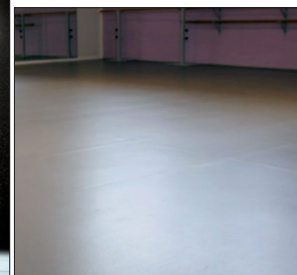

EXCELLENT COMFORT AT THE TRAMPLING



EXCELLENT ENERGY RETURN

ANTHEOpavimentidanza



antheo.pavimentidanza



ANTHEO Pavimenti per la danza

Registered Office

Via Monza, 10 - LISSONE (MB)

Head Office

Via Corino, 30 - LISSONE (MB)

Phone n. +39 340 4882088

info@antheopavimentidanza.it

www.antheopavimentidanza.com